


Lifting stati. Aqualift F XL 300l Duo, SPF 4500-S3, Cast-iron gate valve

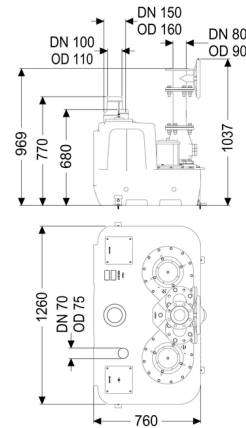

Article information

Item no.: 11067
 GTIN: 4026092057346
 Price group: 50

Advantages

- Different performance classes available
- Pressure sensor for reliable pneumatic level measurement
- Maximum operating reliability due to intelligent control unit (Duo)

Description

The lifting station for faecal and faecal-free wastewater is equipped with a submersible pump and a backflow preventer. The collection tank made of permanently resistant polymer (PE) offers universal connection options and has a screwed access cover.

The station is controlled by a user-friendly control unit, which can be optionally integrated in the building management system via a potential-free contact or alarm and collective fault messages can be output via a GSM interface (Comfort control unit).

Type of wastewater: wastewater with sewage
 Installation situation: free-standing set-up

Version:

Type of system: Twin pump station
 Shut-off valve: Shut-off valve made of cast iron
 Pump control: Control unit
 Backflow preventer: integrated
 Sound absorption mat: yes

Delivery state:

Installation-ready (electrical components,
connection parts must be connected on site)

General characteristics:

Colour: black
Standard: EN 12050-1

Dimensions:

Length: 1,260 mm
Width: 889 mm
Height: 1,042 mm

Tank:

Number of inlets: 1 ST
Inlet nominal size (DN): 100
Inlet nominal size (OD): 110 mm
Inlet max. scoring (DN): 200 mm
Connection for manual diaphragm pump (DN): 32
Tank volume: 300 l
Pumping volume: 175 l
Pressure pipe connection: vertical
Pressure pipe connection (DN): 80 mm
Pressure pipe connection (OD): 90 mm
Venting connection (DN): 70 mm

Pumping device:

Pump: SPF 4500
Number of pumps: 2
Max. pumping capacity: 55 m³/h
Max. pumping height: 20 m
Operating mode: S3 - 50 %
Power P1: 4.2 kW
Power P2: 3.5 kW
Speed: 2,850 U/min
Type of fuse required (electrical protection): 3 x C 25 A
Max. temperature (permanent) of conveyed material: 40 °C
Connection type: Direct connection
Weight: 26 kg
Impeller type: Multi-vane impeller
Length of mains cable for pump: 5 m
Rated current: 7.5 A
Protection class (pump): IP 68 (3m/48h)

| | |
|--------------------------------|--------------------------------|
| Protection class: | I |
| Type of pump connection cable: | H07RN-F 7G 1.5 mm ² |
| Temperature monitoring: | integrated |
| Cos phi - power factor: | 0.85 |
| Insulation class: | F |

Control:

| | |
|--|----------------|
| Control unit: | Comfort |
| Operating voltage: | 400 V |
| Mains frequency: | 50 Hz |
| Self-diagnosis system (SDS): | yes |
| Battery buffering: | yes |
| Multi-line display: | yes |
| Log book function: | yes |
| GSM interface: | yes |
| Potential-free contact: | yes |
| Type of fuse required (electrical protection): | 3 x C 32 A |
| Motor protection switch: | yes |
| Protection class control unit: | IP 54 |
| Length of mains cable for control unit: | 0 m |
| Type of level measurement: | pneumatic |
| Level measurement instrument: | Immersion pipe |
| Alarm sensor: | Immersion pipe |