



## Practicus floor drain DN 70, horiz., Waterproofing layer, Design grating

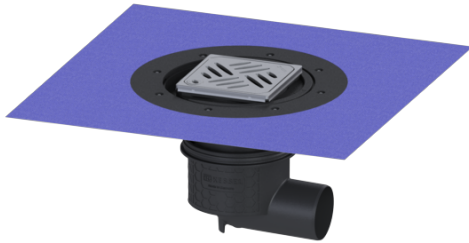

### Article information

Item no.: 45170.53  
 GTIN: 4026092052693  
 Price group: 10

### Advantages

- Hygiene: hygienic,
- absolutely corrosion-free and durable material
- Fire protection: combinable with the Fire-Kit for fire and smoke protection
- Sound insulation: outstanding sound insulation effect confirmed by the Fraunhofer Institute

### Description

The Practicus floor drain is used for point drainage and is equipped with a connection flange as well as a removable odour trap, a lip seal and a temporary protective cover. Including telescopic height-adjustable upper section made of ABS.

The drain meets particular sound insulation requirements in accordance with the measurements of the Fraunhofer Institute in Stuttgart.

The outlet socket is suitable for connection to SML cast iron pipes. With connection option for equipotential bonding.

### Version:

System:	125
Odour trap:	included
Type of waterproofing layer:	Waterproofing layer
Waterproofing layer on the upper section:	Enclosed sealing collar to be glued (bd) according to DIN 18534
Waterproofing layer on the drain body:	Connection flange
Sealing water height:	50 mm

**General characteristics:**

Nominal size (DN):	70
Outer diameter (OD):	75
Standard:	EN 1253-1

**Tank:**

Number of outlets:	1 ST
--------------------	------

**Drain body:**

Material of drain body:	PP
Socket version:	lateral
Vertical adjustment:	vertically adjustable upper section
Vertical adjustment:	10 - 23 mm
Upper section:	adjustable in three dimensions

**Coverage features:**

Type of cover:	Design cover
Grating design:	Kessel
Cover material:	304 stainless steel
Colour of cover:	silver
Load class:	L 15 (EN 1253-1)
Length:	120 mm
Width:	120 mm
Locking:	Lock & Lift

**Grating:**

Rim length:	132 mm
Rim width:	132 mm
Rim material:	304 stainless steel
Upper section material:	ABS
Discharge rate (l/s) with 20 mm backwater:	1.5 l/s