


## Light liquid trap DN 100, Slotted grating, with odour trap

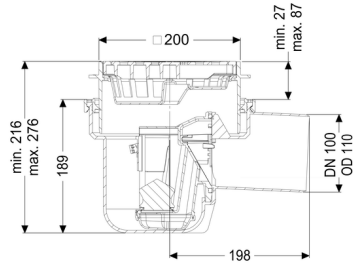

### Article information

Item no.: 51101  
 GTIN: 4026092029763  
 Price group: 10

### Advantages

- Blocks the path of light liquids in the event of an accident/emergency
- Including odour trap

### Description

The light liquid trap made of polymer is suitable for floor slab installation and is equipped with an odour trap and a sludge bucket. The upper section with slotted grating is vertically adjustable.

### Version:

Odour trap:	included
Sealing water height:	50 mm
Backwater protection:	without

### General characteristics:

Nominal size (DN):	100
Outer diameter (OD):	110
Standard:	EN 1253-3, EN 1253-5

### Dimensions:

Length:	320 mm
Width:	243 mm
Cutout dimension, length:	400 mm

Cutout dimension, width: 250 mm

#### **Tank:**

Installation depth: 216 - 276 mm

#### **Drain body:**

Material of drain body: Polymer

Vertical adjustment: vertically adjustable upper section

Vertical adjustment: 30 - 90 mm

#### **Coverage features:**

Type of cover: Slotted cover

Cover material: Polymer

Colour of cover: black

Load class: K 3 (EN 1253-1)

Length: 188 mm

Width: 188 mm

Surface: Polished SST

Sludge bucket: yes

#### **Grating:**

Rim length: 200 mm

Rim width: 200 mm

Shape of upper section: square

Upper section material: Polymer

Discharge rate (l/s) with 20 mm backwater: 1 l/s