


Ferrofix cleanout Sys 125, GI fl., tileable, odour-tight

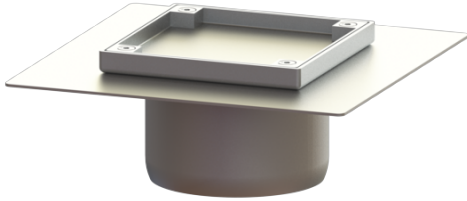

Article information

Item no.: 54911
GTIN: 4026092072394
Price group: 70

Advantages

- Made of a particularly hygienic and mechanically highly resistant stainless steel

Description

The Ferrofix cleanout made of 304 grade stainless steel serves as an upper section for direct connection on pipes. It is equipped with a closed, screwed cover plate.

Version:

System:	125
Waterproofing layer on the upper section:	Adhesive flange (suitable for moisture barriers)

Dimensions:

Length:	246 mm
Width:	246 mm
Height:	100 mm

Coverage features:

Type of cover:	tileable cover plate
Cover material:	304 stainless steel
Max. flooring height:	15 mm
Load class:	L 15 (EN 1253-1)
Height:	15 mm
Tightness:	gas-tight
Surface:	Polished SST
Locking:	screwed

Grating:

Rim length:	146 mm
-------------	--------

Rim width:	146 mm
Shape of upper section:	square
Upper section material:	304 stainless steel