


## Backwater valve Staufix DN 200, Floor slab, tileable, Type 2

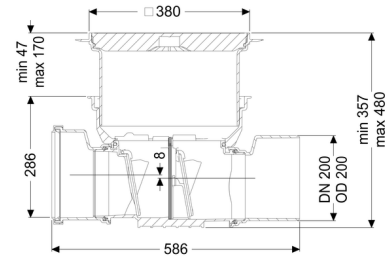

### Article information

Item no.: 730200.10X  
 GTIN: 4026092076569  
 Price group: 10

### Advantages

- Optional rat protection flap for additional safety
- Flexible installation, various covers available for floor slab installation
- Alternatively available as a module set

### Description

The backwater valve for wastewater without sewage is equipped with two mechanical flaps which close automatically in the event of backwater. One flap serves as an emergency closure to be closed by hand.

Thanks to the modular KESSEL system, existing systems can easily be converted to the StaufixControl backwater valve.

|                         |                           |
|-------------------------|---------------------------|
| Type of wastewater:     | wastewater without sewage |
| Installation situation: | floor slab installation   |

### Version:

|   |   |
|---|---|
| Stainless steel flap as rat protection: | no  |
| Type of waterproofing layer:            | Waterproofing layer   |
| Emergency closure:                      | yes   |
| Delivery state:                         | Installation-ready (connection parts must be connected on site) |
| Backwater protection:                   | Type 2  |
| Number of mechanical backwater flaps:   | 2   |

### General characteristics:

|                       |                                 |
|-----------------------|---------------------------------|
| Nominal size (DN):    | 200                             |
| Outer diameter (OD):  | 200                             |
| Note on nominal size: | Hydraulics correspond to DN 150 |
| Colour:               | black                           |
| Standard:             | EN 13564                        |

#### Dimensions:

|                           |        |
|---------------------------|--------|
| Length:                   | 586 mm |
| Width:                    | 444 mm |
| Cutout dimension, length: | 750 mm |
| Cutout dimension, width:  | 750 mm |

#### Tank:

|  |                                     |
|--|-------------------------------------|
| Installation depth:                                    | 341 - 464 mm                        |
| Groundwater resistant from lower edge of base section: | 3000 mm                             |
| Vertical adjustment:                                   | vertically adjustable upper section |

#### Coverage features:

|   |                         |
|---|-------------------------|
| Type of cover:                          | tileable cover plate    |
| Cover material:                         | Polymer                 |
| Max. flooring height:                   | 16 mm                   |
| Load class:                             | K 3 (EN 1253-1)         |
| Length:                                 | 366 mm                  |
| Width:                                  | 366 mm                  |
| Tightness:                              | surface water resistant |
| Locking:                                | Lock & Lift             |
| Vertical drop between inlet and outlet: | 8 mm                    |