




Accessories

Engineering systems base *Ecolift XL*

Outside installation:

Outdoor control cabinet, warning beacon, thermostat/Hygrostat

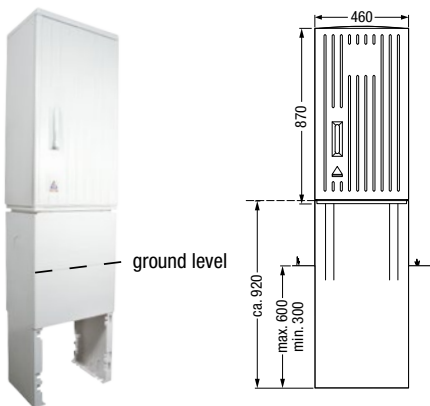


for installation of control units, modems, heating element, warning beacon outside of buildings

			Height over all in mm	Width / depth in mm	Art. no.
Warning beacon	Function: For the additional visual display of faults, for installation on the outdoor control cabinet, with switching unit for connection to the control unit				97 715
Installation set Thermostat / Hygrostat	Function: As an additional module for installation in the outdoor kiosk to reduce condensation				97 713
for control unit, heating, warning beacon	Height over ground level: 870 mm		1740	460/320	97 716
for heating and pressure pipe	Height over ground level: 870 mm		1740	590/320	97 714
for control unit, modem, heating, warning beacon	Height over ground level: 870 mm		1740	785/320	97 723
for control unit, modem, heating, warning beacon and pressure pipe	Height over ground level: 870 mm		1790	1115/320	97 724

- Note:**
- factory cut holes available on request: info@kessel.com
 - for additional custom solutions please see Lifting Stations chapter of this catalogue.
 - if the Outdoor Control Cabinet is exposed to direct sunlight, it is recommended that an optional cooling system is installed

Distance > 10 m to control unit: Cable extensions, air compressor

for extension from 20 m or 30 m (*Ecolift XL* cable length 10 m)

	Hybrid lifting station <i>Ecolift XL</i> with one motor-driven backwater flap	Hybrid lifting station <i>Ecolift XL</i> with two motor-driven backwater flaps		Art. no.
Cable extension for flap motor(s) (10 m)	Extension to 20 m: 1×80 890 Extension to 30 m: 2×80 890	Extension to 20 m: 2×80 890 Extension to 30 m: 4×80 890		80 890
Cable extension for probe(s) (10 m)	Extension to 20 m: 2×80 889 Extension to 30 m: 4×80 889	Extension to 20 m: 3×80 889 Extension to 30 m: 6×80 889		80 889
Cable extension for pump <i>SPF 1400 S1/S3</i> (10 m)	Extension to 20 m: 1×80 891** Extension to 30 m: 2×80 891**	Extension to 20 m: 2×80 891** Extension to 30 m: 4×80 891**		80 891
	** 400 V extension on-site through qualified electrician			
Air compressor	Function: For use in combination with lifting station and pumping stations with pressure control: prevents soiling, avoids the formation of condensate in the pressure hose, makes operation of systems possible with pressure hose lengths > 10 m – 30 m Inclusive: T-piece connection, 20 m pressure hose			28 048
PE-pressure hose extension (per meter)	Compatibility: For Art. no. 28 048			680 071