


Variofix shallow bed upper sections

with covers in stainless steel

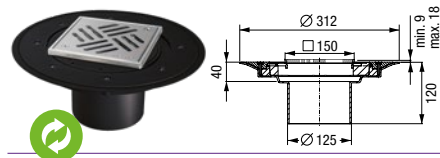

with slotted cover

in stainless steel AISI 304 or AISI 316L

Material: ABS, rim in stainless steel

Class: K 3


Tile thickness: 9 – 18 mm

Cover: 138×138 mm, screwed

Inclusive: Waterproofing membrane

AISI 304 **Art. no. 48 963**

AISI 316L **Art. no. 48 206**

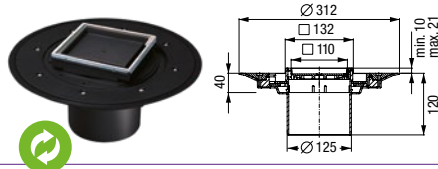

with recessed polymer cover

for on-site tiling

Material: ABS, rim in stainless steel AISI 304

Class: K 3

Tile thickness: 10 – 21 mm

Cover: 110×110 mm (polymer)

Inclusive: Waterproofing membrane

AISI 304 **Art. no. 48 906**

Upper sections

with covers in stainless steel and polymer



with slotted cover

in stainless steel AISI 304

Material: ABS, rim in stainless steel

Class: L 15

Cover: 138×138 mm, screwed

AISI 304 **Art. no. 48 951**



with slotted cover

in stainless steel AISI 304 / 316L or ABS

Material: ABS


Class: K 3

Cover: 138×138 mm, screwed (only in stainless steel)

AISI 304 **Art. no. 48 950**

AISI 316L **Art. no. 48 209**

ABS **Art. no. 48 193, black**



with tileable cover

made of polymer

Material: ABS, rim in stainless steel

AISI 304 or 316L

Class: K 3

Cover: 110×110 mm

AISI 304 **Art. no. 48 211, rim in stainless steel**

AISI 316L **Art. no. 48 207, rim in stainless steel**

Drain body The Ultraflat 79

with odour trap for installation in an upper section



Lateral outlet Ø 50 without inlet

Sealing water height: 50 mm

Ø 50 **Art. no. 44 700**



Lateral outlet Ø 50 with inlet Ø 40

Sealing water height: 50 mm

Ø 50 **Art. no. 44 701**

