

Accessories

Grease separators for free-standing installation

Inspection window

Art. no.

Inspection window

Compatibility: For visual inspection of the thickness of the grease layer; for grease separators for free-standing installation according to EN 1825
Inclusive: High-gloss polished inspection glass, cleaning device, centimetre scale
Note: Only for installation by KESSEL certified workers



913 109

Remote control

Art. no.

Remote control

Compatibility: Fits KESSEL separation systems for free standing installation according to EN 1825, for connection to an isolated ground socket
Version: Model Auto Mix & Pump and Auto Mix in accordance with EN 1825
Cable length: 15 m



916 601

Access panel

Width×Height×Depth
in mm

Art. no.


Recessed wall installation

Compatibility: For Storz-B disposal pipe hook up connection and remote control connection for use with fully automated grease separators. Remote control not included
Material: Stainless steel
Inclusive: 2 doors, lockable
Note: Special dimensions on request



640×440×160

917 414

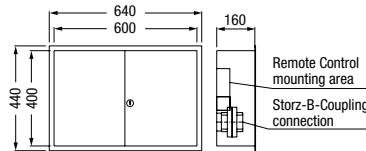

Wall installation

Compatibility: For Storz-B disposal pipe hook up connection and remote control connection for use with fully automated grease separators. Remote control not included
Material: Stainless steel
Inclusive: 2 doors, lockable
Note: Special dimensions on request



600×400×160

917 413

