

# Grease separator *EasyClean* ground Standard NS 1 – 4

for underground installation



EN 1825 DIN 4040-100

Made of polyethylene

**Installation**

- Resistant when installed in the groundwater up to 500 mm
- A load distribution plate must be provided for class D

**Consisting of:**



Upper section made of polymer, infinite height and level adjustment, with cover class A / B, D (class D with *Lock & Lift* function) in accordance with EN 124 made of cast iron, sealed odour-tight, incl. lift-out key

**Delivery:** System completely assembled

**Note:** Further nominal sizes on request

➤ **Accessories:** Sampling chamber, extension section, direct disposal, *SonicControl* (NS 2 and NS 4) page 382 – 385, pumping stations see chapter "3"

➤ **Technical note:** page 379

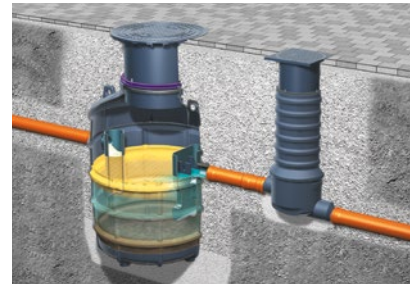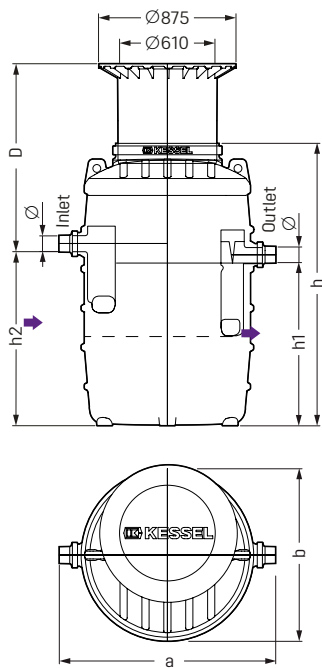

**Underground installation  
frost-free depth 800 mm**

NS	Installation depth D in mm	Art. no.
Cover class A / B		
NS 1	515 - 975	93 001/80B
NS 2	515 - 975	93 002/80B
NS 4	515 - 975	93 004/80B

*Cover class D, with Lock & Lift function*

NS 1	515 - 975	93 001/80D
NS 2	515 - 975	93 002/80D
NS 4	515 - 975	93 004/80D

**Underground installation  
frost-free depth 1200 mm**

NS	Installation depth D in mm	Art. no.
Cover class A / B		
NS 1	765 - 1225	93 001/120B
NS 2	765 - 1225	93 002/120B
NS 4	765 - 1225	93 004/120B

*Cover class D, with Lock & Lift function*

NS 1	765 - 1225	93 001/120D
NS 2	765 - 1225	93 002/120D
NS 4	765 - 1225	93 004/120D

NS	Ø (mm)	a (mm)	b (mm)	h <sup>1)</sup> (mm)	h1 (mm)	h2 (mm)	Weight (kg)	Sludge trap (l)	Water and grease (l)	Grease storage (l)	Total (l)
1	110	1380	1106	1050	540	610	111	140	230	70	370
2	110	1380	1106	1300	790	860	120	200	370	120	570
4	110	1380	1106	1550	1040	1110	130	400	370	160	770

<sup>1)</sup> Specifications apply for type 80. For type 120, h\* = h + 250 mm.

Ø = Outer diameter D = Installation depth

